

Flare

Wall Light



Description

Designed to provide an uplight or downlight to any interior setting, the Flare Wall Light combines the form of the Silhouette - with its library of beautiful and varied material options - with a minimalist, low-profile mounting bracket. Flare can be mounted at any angle and in clusters providing uplight, sidelight and downlight options.

Available Finishes



Technical

Material	Anodised Aluminium, Solid Brass, Solid Copper or Hand Blown Glass
Lamping	9W E27 LED, 820 lm, 3000K warm white, dimmable 6W E27 LED, 505 lm, 2200K warm white, dimmable (Glass) Supplied with AUS/NZ sales (220-240V) only (120V) E26 lamp holder supplied for North America/Canada
LED Lifespan	9W LED lifespan = 15,000 hrs 6W LED lifespan = 20,000 hrs
Control	Phase Control / Network Control dimmable Dimming range 1 - 100%. For optimal dimming performance we recommend sourcing a rotary or push button dimmer with an adjustment dial capable of setting the dimming range of the fixture.
Cord	Black cloth
IP Rating	IP20 - for indoor use only

Certification 

Product Codes SKU

eg. FWV1.ABK = Flare in Anodised Black

FWV1.XXX	Flare Wall Light - Adodised Shade Anodised Black (ABK) and Anodised Gold (AGD)
FWV1.XXX	Flare Wall Light - Precious Metal Shade Solid Copper Gloss (SCG), Solid Copper Matte (SCM), Solid Brass Gloss (SBG) and Solid Brass Matte (SCM)
FWV1.XXX	Flare Wall Light - Hand Blown Glass Shade Black (GBK), Amber (GAM) and Blue (GBL)

Dimensions

Ø120x208x146mm / Ø4.7x8.2x5.8"

Weight

1kg / 2.2lb


Packaging

35x16x16cm / 11.8x6.3x6.3"

Packaging Weight

1.5kg / 3.3lb

Dimensions

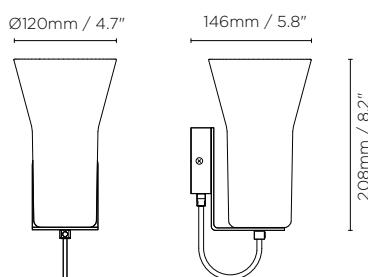

Flare Wall Light